




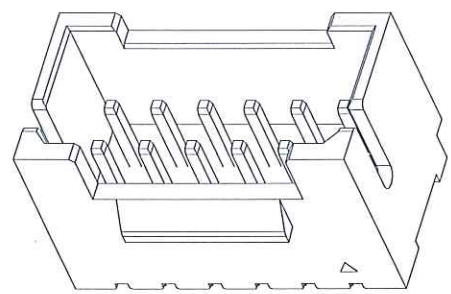
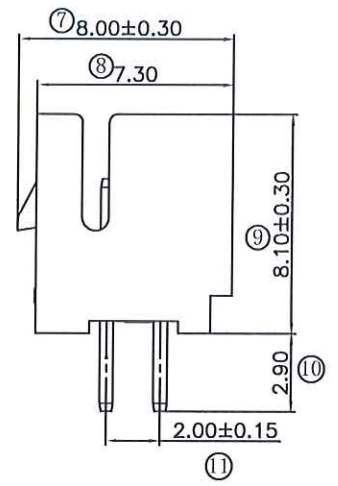
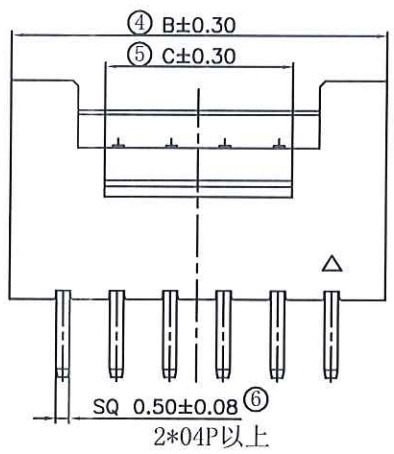


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

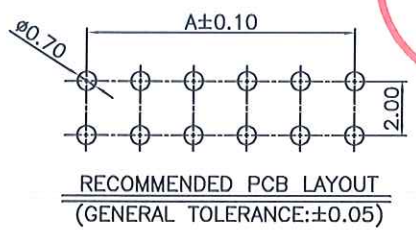

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA10T,UL94V-0 Δ
 1-2.CONTACTS: BRASS
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 TIN/GOLD FLASH PLATED OVER ALL.
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 3A AC/DC
 3-2.CONTACT RESISTANCE: 20 m Ω MAX
 3-3.INSULATION RESISTANCE: 1000M Ω Min
 3-4.DIELECTRIC WITHSTANDING : 1000V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
 5.PACKAGE SPEC: PE BAG
 6.P/N:

SERIES NO: A2009 W 0 3-2 XX 1 X X X
 CONNECTOR: W-WAFER
 ANGLE: 0-180°
 TYPE: 3-TYPE 3
 ROW NO: 2-DOUBLE ROW
 PIN Q'PY: 04~30
 WATER CODE: 0-N/A
 COLOR: M-BEIGE
 PLATING: C-BRIGHT TIN
 TERMIPOINT: 1-DIP

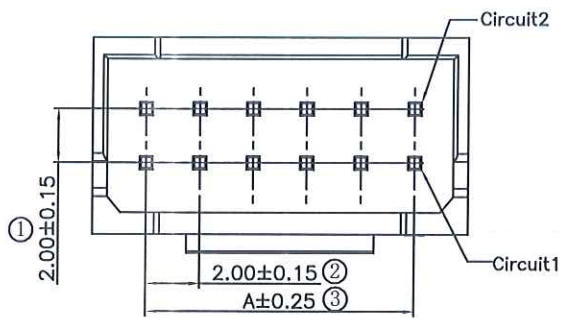


Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
2*02	---	6.00	3.20	2*09	16.00	20.00	13.00
2*03	4.00	8.00	3.20	2*10	18.00	22.00	15.00
2*04	6.00	10.00	3.00	2*11	20.00	24.00	17.00
2*05	8.00	12.00	5.00	2*12	22.00	26.00	19.00
2*06	10.00	14.00	7.00	2*13	24.00	28.00	21.00
2*07	12.00	16.00	9.00	2*14	26.00	30.00	23.00
2*08	14.00	18.00	11.00	2*15	28.00	32.00	25.00

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	1:1					
A1	PA6T IS CHANGED TO PA10T	25.02.19		0.0±0.35	X'REF±6'	APPROVED					
				0.00±0.25	X'±3'	CHECK					
				0.000±0.10	X'X' ±2'	DRAWN					
			UNIT:mm								
			SIZE: A4								

REV: A1 SHEET: 1/2

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS


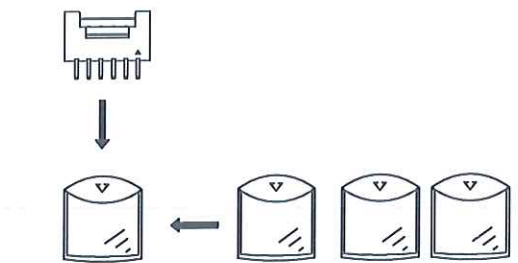


PE袋 1 Pcs
数量 :每袋=2~0.3Kpcs



PE防水袋 1 Pcs

干燥剂

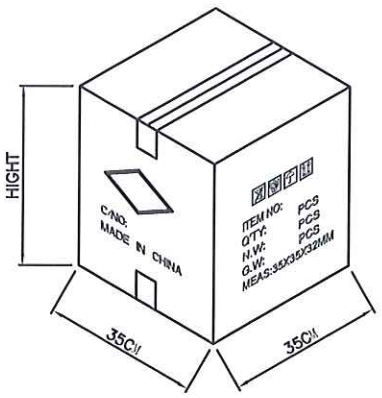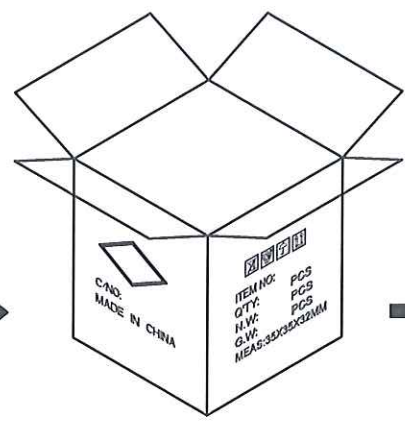

备注:

1. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充;
2. 纸箱分小、中、标准型3种规格型号; 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装;
3. 因生产Pin位未齐全, 每袋与整箱包装数量仅供参考, 具体包装数量以实际出货为准, 或批量出货更新后为准;

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard	大型 Large
长度 Long (CM)	35	35	35	46
宽度 Wide (CM)	35	35	35	46
高度 Hight (CM)	7.5	15	32	46



袋装包装数量			
CKT	PCS/BAG	CKT	PCS/BAG
2*2	2000	2*13	500
2*3	2000	2*14	300
2*4	2000	2*15	300
2*5	1000	2*16	300
2*6	1000	2*17	300
2*7	1000	2*18	300
2*8	1000	2*19	300
2*9	500	2*20	300
2*10	500	2*21	300
2*11	500	2*22	300
2*12	500		

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co., Ltd
AO	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	25.2.19	A2009W03-2XX1XXX	ENDE05		
A1	PA6T IS CHANGED TO PA10T	25.02.19	0.0±0.35	X*REF±6°	CHECK	25.2.19	TITLE: Pitch 2.0mm 180° 双排 DIP Wafer	REV: A1	SHEET: 2/2		
			SIZE: A4	0.00±0.25	X'±3'	DRAWN	25.2.19				
			0.000±0.10	X'X' ±2'							